

# OnCell G3110/G3150

## Industrial quad-band GSM/GPRS/EDGE IP gateways with VPN



- > Universal quad-band GSM/GPRS/EDGE 850/900/1800/1900 MHz
- > Connect to Ethernet and serial devices over an integrated VPN
- > Redundant DC power input
- > 2 digital inputs and 1 relay output
- > Centralize private IP management software with OnCell Central Manager
- > DIN-Rail mounting



### Overview

The OnCell G3110 and G3150 industrial RS-232 and RS-232/422/485 GSM/GPRS/EDGE IP gateways are designed to transmit data transparently over GSM/GPRS/EDGE cellular networks. The OnCell G3110 and G3150 can transmit data from both serial devices and Ethernet devices to a WAN interface, and come with private IP management software and VPN support for handling the IP address

issue in cellular network structures. The products also come with a built-in relay output that can be configured to indicate the priority of events when notifying or warning engineers in the field. Two digital inputs also allow you to connect basic I/O devices, and the OnCell's redundant power inputs assure non-stop operation.

### Specifications

#### Cellular Interface

**Standards:** GSM/GPRS/EDGE  
**Band Options:** Quad-band 850/900 and 1800/1900 MHz  
**EDGE Multi-slot Class:** Class 12  
**GPRS Multi-slot Class:** Class 12  
**GPRS Terminal Device Class:** Class B  
**GPRS Coding Schemes:** CS1 to CS4  
**Tx Power:** 1 watt GSM 1800/1900, 2 watts EGSM 850/900

#### LAN Interface

**Number of Ports:** 1  
**Ethernet:** 10/100 Mbps, RJ45 connector, Auto MDI/MDIX  
**Magnetic Isolation Protection:** 1.5 KV built-in

#### SIM Interface

**Number of SIMs:** 1  
**SIM Control:** 3 V

#### Serial Interface

**Number of Ports:** 1  
**Serial Standards:**  
 G3110: RS-232 (DB9 male connector)  
 G3150: RS-232 (DB9 male connector), RS-422/485 (5-pin terminal block connector)

**ESD Protection:** 15 KV

**Power EFT/Surge Protection:** 2 KV

#### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8  
**Stop Bits:** 1, 1.5, 2 (when parity = None)  
**Parity:** None, Even, Odd, Space, Mark  
**Flow Control:** RTS/CTS, XON/XOFF  
**Baudrate:** 50 bps to 921.6 Kbps

#### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND  
**RS-422:** Tx+, Tx-, Rx+, Rx-, GND  
**RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND  
**RS-485-2w:** Data+, Data-, GND

#### I/O Interface

**Alarm Contact:** 1 relay output with current carrying capacity of 1 A @ 24 VDC

**Digital Inputs:** 2 electrically isolated inputs

- +13 to +30 V for state "1" (On)
- +3 to -30 V for state "0" (Off)

#### Software

**Network Protocols:** ICMP, TCP/IP, UDP, DHCP, Telnet, DNS, SNMP, HTTP, SMTP, HTTPS, SNT, ARP, SSL, IPSec  
**Router/Firewall:** NAT, port forwarding  
**Authentication:** Local user-name and password  
**Security:** Accessible IP list  
**Operation Modes:** Real COM, Secure Real COM, Reverse Real COM, Secure Reverse Real COM, TCP Server, Secure TCP Server, TCP Client, Secure TCP Client, UDP, RFC2217, Ethernet Modem, Virtual Modem, SMS Tunnel  
**Configuration and Management Options:** SNMP MIB-II, SNMP Private MIB, SNMPv1/v2c/v3, DDNS, IP Report, Web/Telnet/Serial-Console/SSH  
**Utilities:** Provided for Windows 95/98/ME, Windows NT, Windows 2000/XP/2003/Vista/Server-2008, Windows XP/2003/Vista/Server-2008 x64 Edition  
**Windows Real COM Drivers:** Windows 95/98/ME, Windows NT, Windows 2000/XP/2003/Vista/Server 2008, Windows XP/2003/Vista/Server 2008 x64 Edition

**Fixed TTY Drivers:** SCO Unix, SCO OpenServer 5, SCO OpenServer 6, UnixWare 7, SVR4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD 5, FreeBSD 6

**Linux Real TTY Drivers:** Linux kernels 2.2.x, 2.4.x, 2.6.x

**Management Software**

**OnCell Central Manager:** Centralized management solution for accessing private IPs from the Internet

**Physical Characteristics**

**Housing:** Aluminum, providing IP30 protection

**Weight:** 440±5 g

**Dimensions:** 28 x 126 x 93 mm (1.10 x 4.96 x 3.66 in)

**Environmental Limits**

**Operating Temperature:** -30 to 55°C (-22 to 131°F)

**Storage Temperature:** -40 to 75°C (-40 to 167°F)

**Ambient Relative Humidity:** 5 to 95% (30°C, non-condensing)

**Power Requirements**

**Input Voltage:** 12 to 48 VDC

**Power Consumption:** 12 to 48 VDC, 900 mA (max.)

**Standards and Certifications**

**Safety:** UL 60950-1

**EMC:** EN 55022 Class A, EN 55024, FCC Part 15 Subpart B Class A

**Radio:** FCC Part 22H, FCC Part 24E, EN 301 489-1, EN 301 489-7, EN 301 511, PTCRB (OnCell G3150 only)

**Reliability**

**MTBF (mean time between failures):** 339,000 hrs


**Warranty**

**Warranty Period:** 5 years


**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

**Dimensions & Pin Assignment**

Unit: mm (inch)

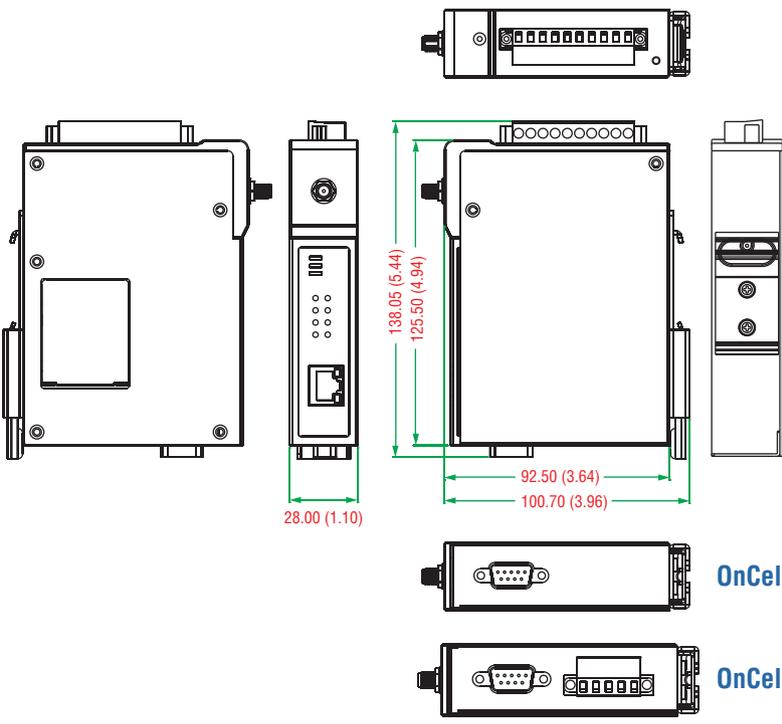

**DB9 male connector**



PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-
9	-	-	-

**OnCell G3110**

**OnCell G3150**

**Ordering Information**

**Available Models**

**OnCell G3110:** 1-port RS-232 to GSM/GPRS/EDGE IP gateway with VPN

**OnCell G3150:** 1-port RS-232/422/485 to GSM/GPRS/EDGE IP gateway with VPN

**Note:** Please visit Moxa's website for a complete list of optional wireless accessories and antennas available for Moxa's wireless products.

**Package Checklist**

- OnCell IP gateway
- Rubber SMA antenna
- DIN-Rail kit
- Documentation and software CD
- Quick installation guide
- Warranty card