

Product Datasheet

6-port Full Gigabit bt Industrial PoE Fiber Switch

ONV-IPS33064PFG-bt



OVERVIEW

The ONV-IPS33064PFG-bt is a full gigabit unmanaged bt industrial PoE fiber switch independently developed by ONV. It has 5*10/100/1000M RJ45 ports and 1*1000M SFP slot port. Port 1-4 can support 71W PoE super high power output and backward compatible with the IEEE802.3af/at PoE standard. Single-port PoE power output is 95W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It provides stable and safe terminals for PTZ network domes, high-power wireless AP, high-power network multimedia speakers, and high-power POE lighting, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy and green energy. Industrial scenes such as construction set up a cost-effective and stable communication network.

Unmanaged model, plug and play, no configuration, easy to use.

FEATURE

■ Full gigabit Ethernet access

- ◊ Gigabit RJ45 ports and SFP fiber port combination, high-speed high-bandwidth connection, to meet the networking needs of various scenarios.
- ◊ Support non-blocking wire-speed forwarding.
- ◊ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

■ Smart PoE power supply function

- ◊ 4*10/100/1000Base-T RJ45 ports can support PoE power supply, meeting the demand for super high power PoE power supply in various scenarios.
- ◊ The maximum output power of single-port POE is 95W, and the backwards compatibility IEEE802.3af/at PoE power supply standard automatically identifies PoE devices for power supply without damaging non-PoE devices.
- ◊ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

■ Stable and reliable

- ◊ CCC,CE, FCC, RoHS.
- ◊ Low power consumption, aluminum alloy casing, No fan.
- ◊ The user-friendly panel, it can show the device status through the LED indicator of PWR, Link/Act, PoE.


TECHNICAL SPECIFICATION

| Model | ONV-IPS33064PF-bt | ONV-IPS33064PFG-bt |
|----------------------------------|--|---|
| Interface Characteristics | | |
| Fixed Port | 4*10/100/1000M bt PoE ports (Data /Power) 2*1000M uplink SFP ports (Data) 2 groud of V+, V- redundant DC power interface (5P Phoenix terminal) | 4*10/100/1000M bt PoE ports (Data /Power) 1*10/100/1000M uplink RJ45 port (Data) 1*1000M uplink SFP port (Data) 2 groud of V+, V- redundant DC power interface (5P Phoenix terminal) |
| Ethernet Port | 10/100/1000Base-TX auto-sensing,full/half duplex MDI/MDI-X self-adaption | |
| Twisted Pair Transmission | 10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter) | |
| SFP Slot Port | Gigabit SFP optical fiber port, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC) | |
| Optical Cable/ Distance | Multi mode: 850nm / 0 ~ 500M, Single mode: 1310nm/ 0 ~ 40KM, 1550nm 0 ~ 120KM. | |
| Chip Parameter | | |
| Network Protocol | IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3u 1000Base-T IEEE802.3z 1000Base-X, IEEE802.3x | |
| Forwarding Mode | Store and Forward(Full Wire Speed) | |
| Switching Capacity | 12Gbps (Non-blocking) | |
| Forwarding Rate@64byte | 8.93Mpps | |


| | |
|---|--|
| MAC | 2K |
| Buffer Memory | 2M |
| Jumbo Frame | 9.2K |
| LED Indicator | Power: PWR (green), network: Link (yellow), PoE: PoE (green) |
| PoE & Power | |
| PoE Port | Port 1 to 4 @bt POE and backward compatible with IEEE802.3af/at |
| Power Supply Pin | Default 1/2 (+), 3/6 (-), 4/5 (+), 7/8 (-) |
| Max Power Per Port | 95W; IEEE802.3af/at/bt |
| Total PWR / Input Voltage | 240W / (DC48-57V) |
| Power Consumption | Standby<6W, Full Load<240W |
| Input Voltage / Interface | 48-57VDC, 5P industrial phoenix terminal, anti-reverse protection |
| Power Supply | No, optional 48V/240W industrial power supply |
| Physical Parameter | |
| Operation TEMP / Humidity | -20~+75°C; 5%~90% RH Non condensing |
| Storage TEMP / Humidity | -40~+85°C; 5%~95% RH Non condensing |
| Dimension (L*W*H) | 119*100*30mm |
| Net /Gross Weight | <0.5kg /<0.7kg |
| Installation | Desktop, 35mm DIN rail mounting |
| Certification & Warranty | |
| Lightning protection / protection level | Lightning protection: 6KV 8/20us, Protection level: IP40 IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-3(RS): 10V/m (80~1000MHz) IEC61000-4-4(EFT): power cable: ±4kV; data cable: ±2kV |

| | |
|-----------------------|---|
| | <p>IEC61000-4-5(Surge):power cable:CM\pm4kV/DM\pm2kV; data cable:\pm4kV</p> <p>IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)</p> <p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022):Class A</p> <p>IEC61000-6-2(Common Industrial Standard)</p> |
| Mechanical Properties | IEC60068-2-6 (anti vibration), IEC60068-2-27 (anti shock), IEC60068-2-32 (free fall) |
| Certification | CCC, CE mark, commercial, CE/LVD EN60950, FCC Part 15 Class B, RoHS |
| Warranty | 5 years, lifelong maintenance. |

DIMENSION

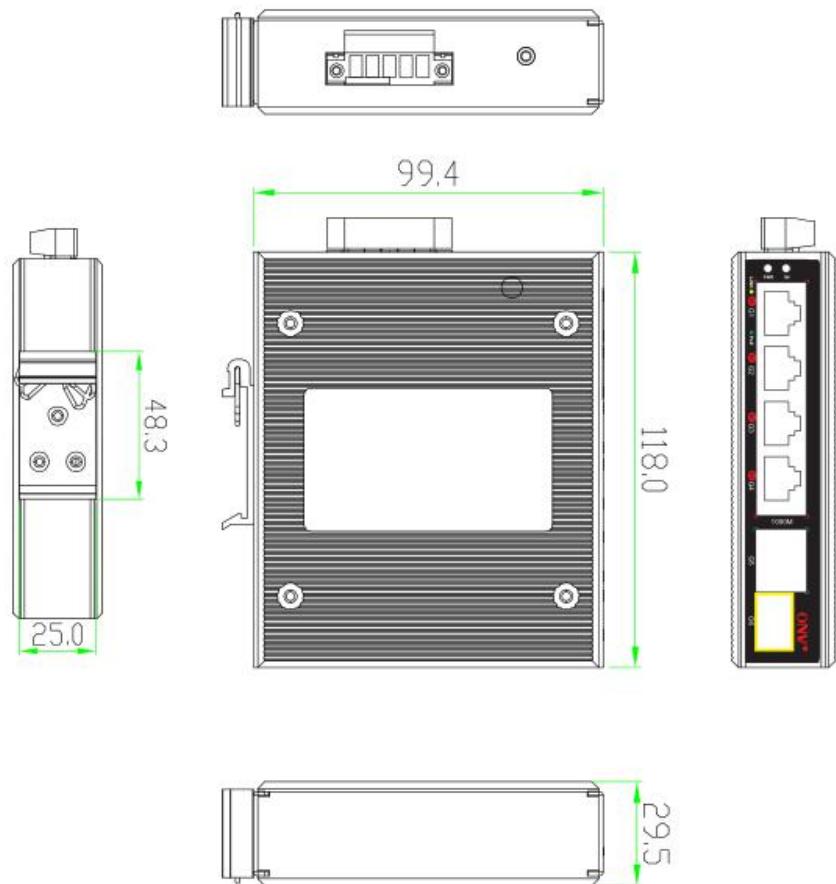

APPLICATION

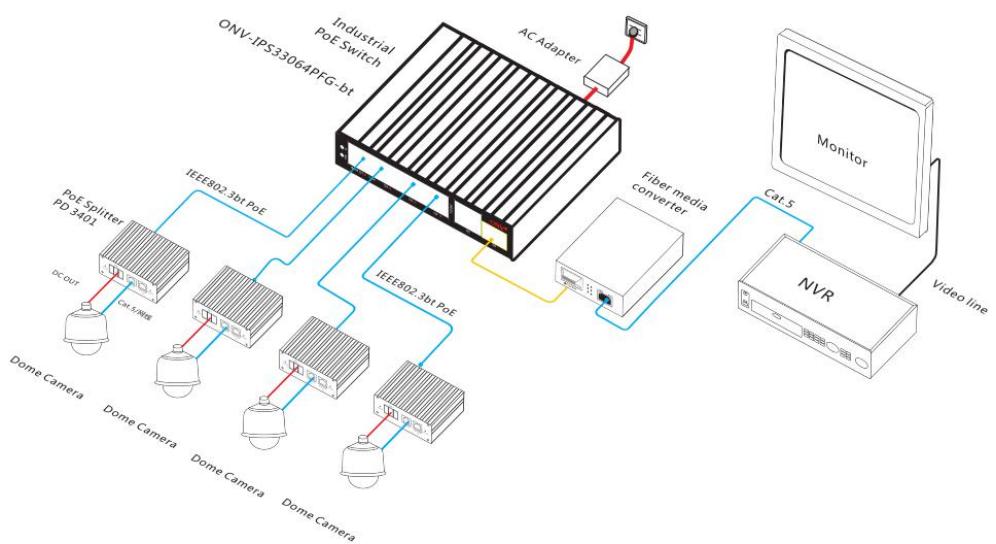

ORDERING INFORMATION

| Model | Description | Configure Power Supply |
|--------------------|--|------------------------|
| ONV-IPS33064PF-bt | Unmanaged bt industrial PoE switch with 4*10/100/1000M RJ45 ports and 2*1000M uplink SFP ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. | 240W |
| ONV-IPS33064PFG-bt | Unmanaged bt industrial PoE switch with 5*10/100/1000M RJ45 ports and 1*1000M uplink SFP port. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. | 240W |

Note: bt industrial PoE fiber switch does not match the SFP optical module and power supply.

PACKING LIST

| PACKING LIST | CONTENT | QTY | UNIT |
|--------------|--|-----|------|
| | 6-port full gigabit bt industrial PoE fiber switch | 1 | SET |
| | User Guide | 1 | PC |
| | Warranty Card | 1 | PC |

OPTICAL MODULE INFORMATION

| Product | Model | Description | Unit |
|---------|-------|-------------|------|
| | | | |

| | | | |
|----------------------------|-------------------|---|----|
| 1.25G Optical Module | ONV-2630 | SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2632 | SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2612-T | SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2613-R | SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | 2612-T-G | Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | 2613-R-G | Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2612-T-S C | SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2613-R-S C | SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support | PC |

| | | | |
|--------------|----------|---|----|
| | | hot plug and pull. | |
| Power Module | ONV-2633 | 1.25G SFP optical module transfers to 10/100/1000M RJ45 port. | PC |

POWER SUPPLY SELECTION TABLE

| Product | Model | Description | Unit |
|---------------------------------------|--------------|--|------|
| 120W DIN Rail Industrial Power Supply | GWS-DP120-48 | Din Rail type 120W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,2A Output Voltage:DC 48V 2.5A Operation Temperature:-40°C—+70°C | PC |
| 240W DIN Rail Industrial Power Supply | GWS-DP240-48 | Din Rail type 240W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,3A Output Voltage:DC 48V 5A Operation Temperature:-40°C—+70°C | PC |
| 480W DIN Rail Industrial Power Supply | GWS-DP480-48 | Din Rail type 480W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,5A Output Voltage:DC 48V 10A Operation Temperature:-40°C—+70°C | PC |

RELATED PRODUCT

| Model | Description |
|--------------------|--|
| ONV-IPS31064P-bt | Unmanaged bt industrial PoE switch with 6*10/100M RJ45 ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS31064PFG-bt | Unmanaged bt industrial PoE fiber switch with 4*10/100M RJ45 ports and 1*10/100/1000M uplink RJ45 port and 1*1000M uplink SFP port. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS31004PF-bt | Unmanaged bt industrial PoE fiber switch with 4*10/100M RJ45 ports and 1*155M uplink SC port. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS31064PF-bt | Unmanaged bt industrial PoE fiber switch with 4*10/100M RJ45 ports and 2*155M uplink SFP ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33064P-bt | Unmanaged bt industrial PoE fiber switch with 6*10/100/1000M RJ45 ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input and DIN rail mounting. |
| ONV-IPS33064PFM-bt | L2+ managed industrial bt PoE fiber switch with 4*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP ports. Port 1-4 can support 71W super high power out and backward compatible with POE@IEEE802.3af/at. It can support dual DC redundant power input |

and DIN rail mounting.

CONTACT US



OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Website: www.onvcom.com

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, HuaNing Road, Xinwei Community, Dalang Street, Longhua District, Shenzhen, China

