

## 21,5" Industrial Touch Screen Monitor with Metal Case

### TPM215-M5



Industrial monitor displays offer high-performance capacitive in industrial-grade LCD flat panels, with 5<sup>th</sup> gen 7mm thin bezel. The touch screen LCD monitor is designed for indoor and outdoor application. The aluminum alloy closed enclosure, higher heat-dissipation than iron materials. IP65 rated dustproof and waterproof for the front panel.



## Specification

### Display

- LCD LED 21,5" 1920x1080dpi 16:9 aspect ratio
- Brightness: 250cd/m2 (1000cd/m2 optional)
- Contrast 1000:1
- 50.000h MTBF backlight
- View angle: 85/85/80/80°
- Responds time: 6,5ms.

### Touch

- 10-Point PCAP Touch
- Resolution 4096 x 4096
- Respond time <10ms.

### I/O Interface

- RJ45 to USB Touch controller (1,5m cable included)
- HDMI, DVI, VGA (1,5m cable included)
- Audio input and output
- Green industrial power connector 12-24V
- 12-24V DC Input

### Environmental

- Operating temperature 0°C to +50°C
- Storage temperature -40°C to +85°C

### Mechanical

- IP65 protection for front panel
- Aluminum alloy enclosure and steel
- Panel mount Clip included.

### Power

- AC adapter 12V 4A, 100-240V, 50-60Hz

### Warranty

- 1 Year (standard)

### Regulatory Approvals


CE, IP65 Front, RoHS, FCC, ISO, IO65

### Options

- No Touchscreen, Resistive Touch
- Built-in Speakers
- High brightness 1000NITS
- Available in Silver or Black color
- 12-36V low voltage DC input power

### Order information

- Model: TPM215-M5
- P/N 133278

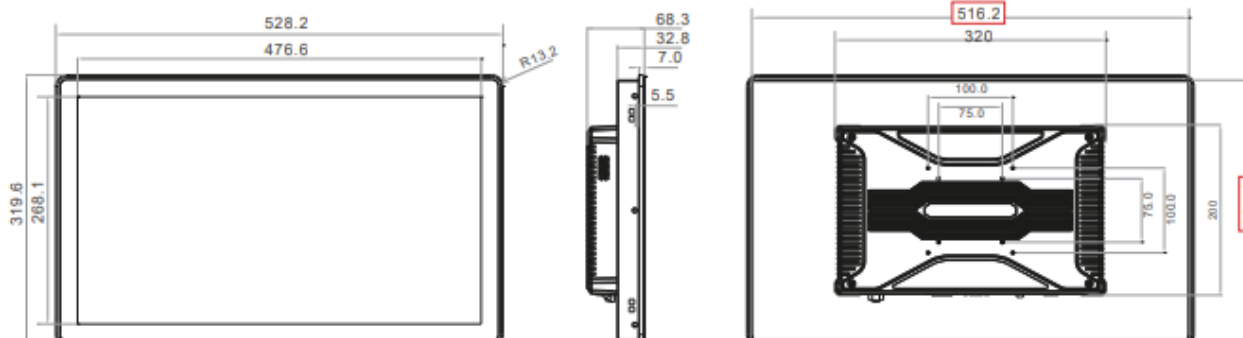

Hatteland Technology AB, Enhagsvägen 7, 187 40 Täby, Sweden.

Phone: +46 (0)10-205 16 50, E-mail: [sales.sweden@hattelandtechnology.com](mailto:sales.sweden@hattelandtechnology.com)

[www.hattelandtechnology.com](http://www.hattelandtechnology.com)