
AUTODOME IP starlight 7000i

www.boschsecurity.com





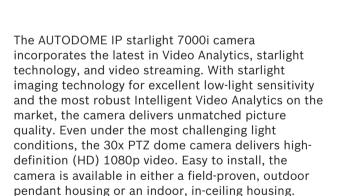

Functions

Exceptional low-light performance

The latest sensor technology combined with the sophisticated noise suppression results in an exceptional sensitivity in color. The low-light performance is so good that the camera continues to provide excellent color performance even with a minimum of ambient light.











- ► Starlight technology with excellent low-light performance and High dynamic range of 120 dB to see detail in difficult light conditions
- ► Incorporates the latest H.265 video compression technology to reduce bandwidth and storage requirements
- Built-in Intelligent Video Analytics alert operators in case of unusual scene activity
- ► Edge intelligence with Intelligent Tracking and object detection even when the camera is moving
- ► Exceptional reliability with 3-year warranty (including on moving parts)

High dynamic range

The dynamic range of the camera is outstanding and is obvious in real-world performance comparisons. In extended dynamic range mode, the camera uses an electronic shutter to capture four images with different exposure time and reproduce a high-contrast frame. The result is that you can view details in both the bright areas (highlights) and the dark areas (shadows) of a scene at the same time. You can easily distinguish objects and features (for example, faces) with bright backlight.

H.265 high-efficiency video encoding

The camera is designed on the most efficient and powerful H.264 and H.265/HEVC encoding platform. The camera is capable of delivering high-quality and high-resolution video with very low network load. With a doubling of encoding efficiency, H.265 is the new compression standard of choice for IP video surveillance systems.

Snap to zoom

Drawing a box in the image will trigger the camera to zoom to the correct position.

Intelligent Video Analytics on the edge

With built-in video content analysis (VCA), the camera reinforces the Intelligence-at-the-Edge concept where edge devices become increasingly intelligent. The camera comes with the state-of-the-art VCA method by Bosch, Intelligent Video Analytics, that reliably detects, and analyzes moving objects while suppressing unwanted alarms from spurious sources in the image.

With this method, the camera is able to detect idle and removed objects as well as loitering, multiple line crossing, and trajectories. This method also supports BEV (Bird's Eye View) People counting.

Video analytics while camera is moving

Outside of pre-positions and even while the PTZ camera is moving, whether on guard tours or manually, the Intelligent Video Analytics application can detect and start alarms when objects are in alarm fields. These alarm fields are defined once across all PTZ camera views. The camera can automatically trigger an alarm if any part of a field within the camera's view becomes active while on a guard tour sweeping across the monitored areas.

Camera Trainer

Based on examples of target objects and non-target objects, the new Camera Trainer program uses machine learning to allow the user to define objects of interest and generate detectors for them. In contrast to the moving objects that the Intelligent Video Analytics application detects, the Camera Trainer program detects both moving and non-moving objects and classifies them immediately. Using Configuration Manager, you can configure the Camera Trainer program using both live video as well as recordings available through the respective camera. The resulting detectors can be downloaded and uploaded for distribution to other cameras.

Intelligent Tracking

The camera utilizes the built-in Intelligent Video Analytics to follow an individual or an object continuously.

When Intelligent Video Analytics detects objects while the camera is in a stationary position, the camera activates the Intelligent Tracking feature. This feature controls the pan/tilt/zoom actions of the camera to track the objects and keep them in view in the scene. The new Intelligent Tracking is based on robust flow detection algorithms which can reliably track moving objects even under challenging scenes.

The tracking and detection reliability can be enhanced further with virtual masking for scenes with a lot of background motion such as trees or other objects creating constant motion in the scene.

The camera supports three modes for Intelligent Tracking:

Auto mode: When configured in this mode, the camera actively analyzes the video to detect any moving object. If it detects movement, it begins to track the object. This mode is most useful for scenarios where normally no motion is expected.

One Click mode: In this mode, users can click an object moving in the live video image to enable the camera to track the movement of the selected object. This mode is most useful for scenarios where normal scene activity is expected.

Triggered mode: In this mode, the camera continuously analyzes the scene for alarms or rule violations. If a rule is violated, it triggers the advanced tracking feature of the camera to start following the object / person that triggered the alarm.

This unique combination of robust Intelligent Video Analytics and Intelligent Tracking allows the camera to track moving objects of interest without getting distracted by other moving objects in the scene.

Intelligent streaming reduces bandwidth and storage requirements

The low-noise image and the efficient H.265 compression technology provide clear images while reducing bandwidth and storage by up to 80% compared to standard H.264 cameras. With this new generation of cameras an extra level of intelligence is added with Intelligent Streaming. The camera provides the most usable image possible by cleverly optimizing the detail-to-bandwidth ratio. The smart encoder continuously scans the complete scene as well as regions of the scene and dynamically adjust compression based on relevant information like movement. Together with Intelligent Dynamic Noise Reduction, which actively analyzes the contents of a scene and reduces noise artifacts accordingly, bitrates are reduced by up to 80%. Because noise is reduced at the source during image capture, the lower bitrate does not compromise image quality. This results in substantially lower storage costs and network strain and still retain a high image quality and smooth motion.

Image Stabilization

As PTZ cameras continue to increase their optical zoom capabilities, image stabilization becomes critical to eliminate movement caused by unstable camera mounts. Minor movement of the camera mount can shift the field of view by a large distance when the camera is zoomed to a high value. This can render images unusable. The camera incorporates an Image Stabilization algorithm; when turned on, the camera detects continuous vibration. If it detects vibration, the camera dynamically corrects the shaky video in both the vertical and horizontal axis, resulting in improved image clarity and a stable field of view on the monitor.

Auto Exposure (AE) region and Focus region

With the Auto Exposure (AE) function, the camera computes the lighting condition of the entire scene. Then the camera determines the optimum level of iris, gain, and shutter speed.

In AE region mode, users can designate a specified area of the scene, based on pre-positions. The camera computes the lighting condition of the specified area. Then the camera determines the optimum level of iris, gain, and shutter speed to get an image.

Focus region mode, unlike normal auto focus mode, allows users to focus on a specified area of the scene. Users have the ability to customize these modes, if necessary, for the specific requirements of the site.

Simple set-up

The camera has a very intuitive user interface that allows fast and easy configuration. Configurable scene modes are provided with the best settings for a variety of applications.

Standard

This mode is optimized for most standard scenes both indoor and outdoor.

· Color Only (Traffic)

In this mode, the camera does not switch to monochrome mode at low light levels. The mode is optimized to minimize motion artifacts and to capture the color of vehicles/pedestrians and traffic lights, even at night, for scenarios such as city surveillance and traffic monitoring.

• Indoor

This mode is ideal for indoor applications where lighting is constant and does not change. Auto white balance will be mainly focused on low color temperature 3200K.

· Sensitivity boost

This mode provides maximum sensitivity in low light scenes by using longer exposure times, resulting in bright images even in extreme low light.

Fast movement

This mode is used for monitoring fast moving objects like cars in traffic scenes. Motion artifacts are minimized and the image is optimized for a sharp and detailed picture in color and monochrome.

Vibrant

This mode provides a more vivid image with increased contrast, sharpness, and saturation.

Sophisticated alarm responses

The camera supports advanced alarm control that uses sophisticated rules-based logic to determine how to manage alarms. In its most basic form, a "rule" could define which input(s) should activate which output(s). In a more complex form, inputs and outputs can be combined with pre-defined or user-specified commands to perform advanced camera functions.

Pre-positions and tours

The camera supports 256 pre-positions and two styles of Guard Tours: Preset and Record/ Playback. Users can easily adjust the image setting for individual

preposition if necessary, to see the detail for specific requirement of the sites. Totally users can also configure the preset standard tour with as many as 256 sequential pre-positions, with a configurable dwell time between pre-positions. The camera also provides support for two recorded tours, which are recorded macros of an operator's movements, including pan, tilt, and zoom activities, and can be played back with the click of a button.

Data security

Special measures are necessary to ensure the highest level of security for device access and data transport. On initial setup, the camera is only accessible over secure channels. You must set a service-level password in order to access camera functions. Web browser and viewing client access can be protected using HTTPS or other secure protocols that support state-of-the-art TLS 1.2 protocol with updated cipher suites including AES encryption with 256 bit keys. No software can be installed in the camera, and only authenticated firmware can be uploaded. A threelevel password protection with security recommendations allows users to customize device access. Network and device access can be protected using 802.1x network authentication with EAP/TLS protocol. Superior protection from malicious attacks is guaranteed by the Embedded Login Firewall, on-board Trusted Platform Module (TPM) and Public Key Infrastructure (PKI) support.

The advanced certificate handling offers:

- Self-signed unique certificates automatically created when required
- · Client and server certificates for authentication
- Client certificates for proof of authenticity
- · Certificates with encrypted private keys

Power options

The camera can be powered by either PoE+ (IEEE 802.3at) capable network switch or a High Power-over-Ethernet Midspan. In a PoE configuration, a single (Cat5e/Cat6e) cable connection provides power while simultaneously supporting data and video transmission. For maximum reliability, the camera can operate with 24 VAC power source a redundant power system of PoE and a separate connected simultaneously. If either the PoE or 24 VAC power source fails, the camera seamlessly transitions to the remaining power source. The camera can also accept a standard 24 VAC power source if a PoE network interface will not be used.

For pendant models used in outdoor applications that require heaters, a High PoE Midspan (60 W) by Bosch is required to power both the camera and its internal heaters.

For in-ceiling or indoor pendant applications that don't require heater power, standard PoE+ (IEEE 802.3at) midspans or switches can be used to power the camera.

System integration and ONVIF conformance

The camera conforms to the ONVIF (Open Network Video Interface Forum) specification which guarantees interoperability between network video products regardless of manufacturer. The ONVIF Profile S specification allows easy integration with other conformant devices and VMS. ONVIF conformant devices are able to exchange live video, audio, metadata, and control information, and ensure that they are automatically discovered and connected to network applications such as video management systems.

PTZ drive and mechanism

The camera offers a reliable drive platform, designed for continuous tours for at least three years. It provides an unlimited three-year warranty. Its design provides optimum smoothness in motion when used at low speeds or with a joystick.

Pan and tilt preset repeatability are accurate to within ±0.1 degrees to ensure that the correct scene is captured every time. The camera delivers variable pan/tilt speeds from a crawl speed of only 0.1 degrees per second to a full 400 degrees per second. The camera is capable of pan speeds of 400 degrees per second and tilt speeds of 300 degrees per second between pre-positions. The camera provides a tilt angle 18 degrees above the horizon, and a pan range of up to 360 degrees continuous rotation.

Design for challenging environments

Pendant housings are rated to provide IP66 protection and offer an operating temperature range down to -40 °C (-40 °F). The pendant model comes fully assembled with a sunshield which can be easily removed for use in indoor applications. In addition, both pendant and in-ceiling camera models have a high-resolution acrylic bubble for enhanced image clarity.

Ease of installation and servicing

The camera has been designed for quick and easy installation, a key feature from Bosch IP video products. All housings feature recessed screws and latches for increased tamper resistance. Bosch offers a full complement of hardware and accessories (sold separately) for wall, corner, mast, roof, and pipe mount for indoor and outdoor environments, which allow the camera to be adapted easily to individual site requirements.

Remotely upgrade the camera whenever new firmware becomes available. This ensures up-to-date products, thus protecting investment with little effort.

Fiber Optic Kit

Bosch offers the optional VG4-SFPSCKT, a unique media converter module for use with various Bosch devices. This media converter module is designed to accept a wide-range of 10/100 Mbps SFP modules for use with Multimode or Single-mode optical fiber with LC or SC connectors.

The media converter module along with the SFP module is user-installed directly into the camera's power supply box to provide an integrated fiber optic solution.

Camera Diagnostics

The camera has several built-in sensors / advanced diagnostics that display warnings on the camera's OSD about the health of the camera. The diagnostics log records the events such as:

- Low voltage a drop in incoming power below the level where the camera becomes non-functional
- High temperature the internal temperature exceeds specifications
- Low temperature the internal temperature exceeds minimum levels
- · High humidity the internal humidity exceeds 70%
- · Total hours of camera operation

Certain events also appear on the camera's OSD. These diagnostic records are available for the installation or service technician to review.

Certifications and approvals

For a full list of all related certifications/standards, refer to the Product Tests Report, available on the online catalog, on the Documents tab of the product page for your device. If the document is unavailable on the product page, contact your sales representative.

| Electromagnetic compatibility (EMC) | FCC Part 15, ICES-003 EN 55024:2010 + A1:2015 EN 55032:2015/AC:2016 EN 61000-3-2:2014 EN 61000-3-3:2013 |
|--|---|
| Product Safety | Complies with UL, CE, CSA, EN, and IEC standards including: UL 62368-1 EN 62368-1 EN 60950-1 CAN/CSA-C22.2 No. 62368-1-14 IEC 62368-1 Ed.2 IEC 60950-1 Ed.2 IEC 60950-22 Ed.2 |
| Marks | UL, CE, WEEE, RCM, EAC, VCCI, FCC, RoHS |

Technical specifications

AUTODOME IP starlight 7000i

| Imager | 1/2.8 in. CMOS sensor |
|--|--|
| Effective Picture Elements (Pixels) | 1944 x 1212 (2.35 MP) |
| Lens | 30x motorized Zoom 4.3 mm to 129 mm F1.6 to F4.7 |
| Field of View (FOV) | 2.3° to 64.7° |

| Focus | Automatic with manual override | |
|---|--------------------------------|--|
| Iris | Automatic with manual override | |
| Digital Zoom | 12x | |
| Day/Night switch | Automatic IR cut filter | |
| Video performance - | Sensitivity | |
| (3100K, reflectivity 89%, 1/30, F1.6, 30 IRE) | | |
| Color | 0.0077 lx | |
| Monochrome | 0.0008 lx | |
| Video performance - Dynamic range | | |
| High dynamic range | 120 dB WDR | |
| Measured according to IEC 62676 Part 5 | 100 dB WDR | |
| | | |

Additional Camera Settings

| Gain control | AGC, Fixed |
|------------------------------|---|
| Aperture correction | Horizontal and vertical |
| Shutter | 1 to 1/10000sec |
| Signal-to-Noise Ratio (SNR) | >55 dB |
| Backlight compensation (BLC) | On/Off |
| White balance | 2000 K to 10,000 K ATW, indoor, outdoor, AWB Hold, Extended ATW, Manual, Sodium Lamp Auto, Sodium Lamp |
| Defog mode feature | Improves visibility when viewing foggy or other low-contrast scenes. |

| Noise Reduction | Intelligent Dynamic Noise Reduction |
|-----------------|-------------------------------------|
| Noise neadellon | intelligent Dynamic Noise neduction |

| DORI | DORI definition | | Distance to object | |
|-----------|-----------------|----------|--------------------|----------------|
| | | WIDE 1X | TELE 30X | Scene width |
| Detect | 25 px/m | 61 m | 1913 m | 77 m |
| | (8 px/ft) | (200 ft) | (6276 ft) | (252 ft) |
| Observe | 63 px/m | 24 m | 765 m | 31 m |
| | (19 px/ft) | (79 ft) | (2510 ft) | (100 ft) |
| Recognize | 125 px/m | 12 m | 383 m | 15 m |
| | (38 px/ft) | (410 ft) | (1255 ft) | (50 ft) |
| Identify | 250 px/m | 6 m | 191 m | 8 m |
| | (76 px/ft) | (20 ft) | (628 ft) | (25 ft) |

Video content analysis

| Analysis type | Intelligent Video Analytics |
|-----------------------------|---|
| Configurations | Off / Global VCA / Profiles 1 - 16 |
| Calibration | Automatic self-calibrating when height is set |
| Alarm rules (combinable) | Any object, Object in field, Crossing line, Entering field, Leaving field, Loitering, Following route, Idle object, Removed object, Counter, Occupancy, Crowd detection, Condition change, Similarity search, Tampering |
| Object filters | Duration, Size, Aspect ratio v/h, Speed, Direction, Object classes (Upright persons, Bikes, Cars, Trucks), Color |

Miscellaneous

| Miscendicous | |
|------------------------|--|
| Sectors/Title | 4, 8, 12, or 16 user-selectable, independent Sectors, each with 20 characters per Title |
| Privacy Masks | 32 individually configurable Privacy Masks; maximum 8 per Pre-position; programmable with 3, 4 or 5 corners; selectable color of Black, White, Gray, "Auto" (average background color) |
| Virtual Masking | 24 individually configurable Virtual Masks to hide parts of the scene (background motion such as moving trees, pulsating lights, busy roads, etc.) which should not be considered for flow analysis to trigger Intelligent Tracking. |
| Pre-positions | 256 Pre-positions, each with 20 characters per Title |
| Guard Tours | Custom Recorded Tours - two (2), total duration 30 minutes: Pre-position tour - one (1), consisting of up to 256 scenes consecutively, and one (1) customized with up to 64 user-defined scenes |
| Supported Languages | English, Czech, Dutch, French, German, Italian, Polish, Portuguese, Russian, Spanish, Japanese, Chinese |

Network

| Video compression | H.265, H.264, M-JPEG |
|-------------------|--|
| Streaming | Four (4) streams: Two (2) configurable streams in H.264 or H.265; One (1) I-framesonly stream based on first stream; One (1) M-JPEG Stream |
| Frame rate | 1080p: 30fps; 720p: 60fps |

| Protocols IPv4, IPv6, UDP, TCP, HTTP, HTTPS, RTP/ | | Electrical | | | | |
|--|--|--|-----------------------------------|--|--|--|
| | RTCP, IGMP V2/V3, ICMP, ICMPv6, RTSP, FTP, ARP, DHCP, APIPA (Auto-IP, link local address), NTP (SNTP), SNMP (V1, V3, MIB-II), 802.1x, DNS, DNSv6, DDNS (DynDNS.org, selfHOST.de, no-ip.com), SMTP, iSCSI, UPnP (SSDP), DiffServ (QoS), LLDP, SOAP, Dropbox™, CHAP, digest authentication | | | In-Ceiling | Pendant | |
| | | | Power | 24 VAC High PoE (using a Bosch model of High PoE Midspar required to power the heater) PoE+ (IEEE 802.3at, class 4 standard) (when used without powering the heater) | | |
| Interoperability | ONVIF Profile S, ONVI Profile T, Auto-MDIX | F Profile G, ONVIF | Power Consumption (typical) | 19.2 W / 33.6 VA | 51.0 W / 54.0 VA (heaters on) or 19.2 W / 33.6 VA (heaters off / | |
| Ethernet | 10BASE-T/100BASE- duplex | T, auto-sensing, half/full | (1) (1) | | without heater connected in 24 V power supply box) | |
| Encryption | TLS 1.2, DES, 3DES, | AES | Audio | | | |
| Ethernet connector | RJ45 | | Audio | | | |
| GOP Structure | IP, IBP, IBBP | | - Standard | | 1, 8 kHz sampling rate | |
| Data Rate (H.265, 1080P) | 61 kbps to 2.8 Mbps (scene, the frame rate, | depending on the and the quality settings) | | | 16 kHz sampling rate 16 kHz sampling rate | |
| Overall IP Delay | 60 fps: 166 ms (typic 30 fps: 233 ms (typic | | - Signal-to-Noise Ratio | >50 d | IB | |
| | 00 ips. 200 iiis (typio | | - Audio Streaming | - Audio Streaming Bidirectional (full-duplex) | | |
| Resolutions (H x V) | | | Local Storag | ge | | |
| 1080p HD | 1920 x 1080 | | Memory Card Slo | | User-supplied SD/SDHC/SDXC memory card (maximum 2TB – SDXC) | |
| 720p HD | 1280 x 720 | | | | | |
| 1.3 MP 5:4 (cropped) | 1280x 1024 | | Recording | Recording Continuous recording of video and audio, alarm/events/schedule recording | | |
| D1 4:3 (cropped) | 704 x 480 | | Fiber Optic Kit | | | |
| 640x 480 | 640 x 480 | | VG4-SFPSCKT | VG4-SFPSCKT | | |
| 432p SD | 768 x 432 | | Description | | Fiber Optic Ethernet Media Converter kit ⁶ . | |
| 288p SD | 512 x 288 | | | | Requires a small form-factor pluggable (SFP) module (sold separately). | |
| 144p SD | 256 x 144 | | Data Interface | Ethernet | | |
| Mechanical | | | Data Rate | 10/10 | 00 Mbps | |
| D. D. | In-Ceiling | Pendant | | IEEE 8 Full Di | 802.3 Compliant uplex or Half Duplex Electrical Port uplex Optical Port | |
| Pan Range | 360° cont. | 360° cont. | Compatible Rece | | | |
| Tilt Angle | 1° above horizon | 18° above horizon | | | | |
| Pre-position Speed | Pan: 400°/s Tilt: 300°/s | Pan: 400°/s Tilt: 300°/s | Installation | VG4-A | ed inside a VG4-A-PA0, VG4-A-PA1, A-PA2, VG4-A-PSU1, or a VG4-A-PSU2 r supply box with supplied mounting | |
| Pan/Tilt Modes | | | | hardw | vare | |
| • Turbo mode Pan: 0.1°/s - 400°/s (Manual Control) Tilt: 0.1°/s - 300°/s | | 6. Kit available separately an | d must be installed insid | de the AUTODOME power supply box. | | |
| Normal Mode | 0.1°/s-120°/s | 0.1°/s-120°/s | SFP Module | s | | |
| Pre-position Accuracy | ± 0.1° typ. | ± 0.1° typ. | Description Interch | | hangeable modules available for use with or SMF optical fiber. | |
| Intelligent Tracking Speed | >0.2°/second (minimum) | | Data Interface | Etheri | net | |

| Data Rate 10/100 Mbps IEEE 802.3 Compliant Weight (all SFP modules) Dimensions (LxWxH) SFP-2, SFP-3: 55.5 x 13.5 x 8.5 mm (2.2 x 0.5 x 0.3 in.) SFP-25, SFP-26: 63.8 x 13.5 x 8.5 mm (2.5 x 0.5 x 0.3 in.) Type Connector Wavelength (transmit / receive) SFP-2 MMF Duplex LC 1310 nm / 2 km (1.2 miles) SFP-3 SMF Duplex LC 1310 nm / 20 km (12.4 miles) SFP-25 MMF Single SC 1310 nm / (1.2 miles) SFP-26 MMF Single SC 1310 nm / (1.2 miles) SFP-26 MMF Single SC 1550 nm / (1.2 miles) Fiber Compatibility Optical Fiber Compatibility, MMF Solution of the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Distance Specifications Specified transmission distances are limited to operate over the entire optical loss budget range, so they do not require a minimum loss in order to operate. | | | | | | |
|--|------------|--------------------|---|---|---|--|
| Dimensions (LxWxH) SFP-2, SFP-3: 55.5 x 13.5 x 8.5 mm (2.2 x 0.5 x 0.3 in.) SFP-26: 63.8 x 13.5 x 8.5 mm (2.5 x 0.5 x 0.3 in.) Type Connector Wavelength (transmit / receive) SFP-2 MMF Duplex LC 1310 nm / 2 km (1.2 miles) SFP-3 SMF Duplex LC 1310 nm / 20 km (1.2 miles) SFP-25 MMF Single SC 1310 nm / 2 km (1.2 miles) SFP-26 MMF Single SC 1310 nm / 2 km (1.2 miles) SFP-27 SFP-28 MMF Single SC 1310 nm / 2 km (1.2 miles) SFP-29 SFP-20 MMF Single SC 1550 nm / 2 km (1.2 miles) Fiber Compatibility Optical Fiber Compatibility, MMF Solvate 4 dB from the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Fiber Compatibility, SMF Specified transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | Data Rate | | · | | | |
| $SFP-25, SFP-26: 63.8 \times 13.5 \times 8.5 \text{ mm } (2.5 \times 0.5 \times 0.3 \text{ in.})$ $Type $ | | SFP | 0.23 kg (0.05 lb) | | | |
| SFP-2 MMF Duplex LC 1310 nm / 1310 nm (1.2 miles) | Dimensions | Dimensions (LxWxH) | | 0.5 x 0.3 in.) SFP-25, SFP-26: 63.8 x 13.5 x 8.5 mm (2.5 x | | |
| SFP-3 SMF Duplex LC 1310 nm / (1.2 miles) SFP-25 MMF Single SC 1310 nm / (12.4 miles) SFP-26 MMF Single SC 1310 nm / (1.2 miles) SFP-26 MMF Single SC 1550 nm / (1.2 miles) Fiber Compatibility Optical Fiber Compatibility, MMF Solution of the optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Distance Specifications Specifications Specificat transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | | Туре | Connector | (transmit / | *************************************** | |
| SFP-25 MMF Single SC 1310 nm / (12.4 miles) SFP-26 MMF Single SC 1550 nm / (1.2 miles) SFP-26 MMF Single SC 1550 nm / (1.2 miles) Fiber Compatibility Optical Fiber Compatibility, MMF Solution of the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Fiber Compatibility, SMF Specified transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | SFP-2 | MMF | Duplex LC | | | |
| SFP-26 MMF Single SC 1550 nm / 1310 nm (1.2 miles) Fiber Compatibility Optical Fiber Compatibility, MMF 50/125 μm MMF. For 50/125 μm fiber, subtract 4 dB from the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Fiber Compatibility, SMF 8-10/125 μm SMF. Must meet or exceed fiber standard ITU-T G.652. Optical Distance Specifications Specified transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | SFP-3 | SMF | Duplex LC | • | | |
| Fiber Compatibility Optical Fiber Compatibility, MMF 50/125 µm MMF. For 50/125 µm fiber, subtract 4 dB from the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Fiber Compatibility, SMF 8-10/125 µm SMF. Must meet or exceed fiber standard ITU-T G.652. Optical Distance Specified transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | SFP-25 | MMF | Single SC | | | |
| Optical Fiber Compatibility, MMF 50/125 μm MMF. For 50/125 μm fiber, subtract 4 dB from the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Fiber Compatibility, SMF 8–10/125 μm SMF. Must meet or exceed fiber standard ITU-T G.652. Optical Distance Specifications Specified transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | SFP-26 | MMF | | | | |
| Compatibility, MMF subtract 4 dB from the specified optical budget value. Must meet or exceed fiber standard ITU-T G.651. Optical Fiber Compatibility, SMF 8-10/125 µm SMF. Must meet or exceed fiber standard ITU-T G.652. Optical Distance Specifications Specified transmission distances are limited to the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | Fiber Com | patibility | | | | |
| Compatibility, SMF fiber standard ITU-T G.652. Optical Distance Specifications S | ' | | subtract 4 dB from the specified optical budget value. Must meet or exceed fiber | | | |
| Specifications the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | | | | | | |
| | | | the optical loss of the fiber and any additional loss introduced by connectors, splices, and patch panels. The modules are designed to operate over the entire optical loss budget range, so they do not require a minimum loss | | | |

User Connections

| Power, Network | RJ45 10Base-T/100Base-T |
|-------------------|--|
| Power, Camera | 24VAC, 50/60Hz |
| Alarm Inputs (7) | 2 supervised, 5 non-supervised |
| Alarm Outputs (4) | 1 dry contact relay, 3 open collector/ transistor outputs Programmable for "normally open" or "normally closed" 32 VDC @ 150 ma max. |
| Audio | 1 x mono line in, 1 x mono line out Signal line in: 20 kOhm typical, 0.707 Vrms Signal line out: 0.707 Vrms at 16 Ohm, typical |

Environmental

| | In-Ceiling | Pendant |
|--|------------------------------------|---|
| | NDP-7512-Z30C NDP-7512-Z30CT | NDP-7512-Z30 NDP-7512-Z30K (Rugged) |
| Ingress Protection Rating/ Standard | IP54, Plenum rated | IP66, NEMA 4X1 |
| Operating temperature (with heater wired) | -10 to +40 °C (+14 to +104 °F) | -40 to +55 °C (-40 to +131 °F) -10 to +55 °C (+14 to +131 °F) (without heater wired) Maximum temperature: 74 °C (165 °F) in accordance with NEMA TS 2-2003 (R2008) |
| Storage temperature | -40 to +60 °C (-40 to +140 °F) | -40 to +60 °C (-40 to +140 °F) |
| Operating Humidity | 0% to 90% RH, (non- condensing) | 0% to 100% RH, condensing |
| Vibration | IEC 60068-2-6 | IEC 60068-2-6 NEMA TS2 Section 2.2.8 |
| Shock | IEC 60068-2-27 | IEC 60068-2-27 NEMA TS2 Section 2.2.9 |
| Salt Mist Spray (Corrosion Test) | | IEC 60068-2-52 |
| External Mechanical Impact | | IEC 60068-2-75: IK10 (NDP-7512-Z30K only) |

1. NEMA 4X for:

- -Access to Hazardous parts
- -Ingress of solid foreign objects (falling dirt, circulating dust, settling dust)
- -Ingress of water (dripping and light splashing, hose down and splashing)
- -Corrosive agents

Meets requirements for NEMA 4X certification (NDP-7512-Z30K). Meets requirements for NEMA 4X, except impact test (NDP-7512-Z30).

Construction

| Dimensions | 224 mm (8.8 in.) x 299.4 mm (11.8 in.) |
|------------------------------------|---|
| Weight | In-ceiling: 2.6 kg (5.7 lb) Pendant: 3.2 kg (7 lb) |
| Bubble Size | 153.1 mm diameter (6.03 in.) |
| Construction Material , Housing | In-ceiling: Magnesium Pendant: Cast aluminum |

| Construction Material , Bubble | In-ceiling: acrylic Pendant: acrylic Pendant (IK10): nylon |
|-----------------------------------|--|
| Standard Color | White (RAL 9003) |
| Standard Finish | Powder coated, sand finish |

Mounts/Accessories

Bubbles

In-ceiling

| Clear HD high-resolution acrylic | VGA-BUBHD-CCLA |
|---|----------------|
| Tinted HD high-resolution acrylic (Included with in-ceiling camera models.) | VGA-BUBHD-CTIA |

Pendant

| Clear high-resolution acrylic (Included with pendant camera models.) | VGA-BUBBLE-PCLA |
|---|-----------------|
| Tinted high-resolution acrylic | VGA-BUBBLE-PTIA |
| Clear rugged IK10-rated nylon* | VGA-BUBBLE-IK10 |

^{*}Included with NDP-7512-Z30K

Mounts

| Pendant Arm Mounts | |
|---|---|
| Wall Arms | VG4-A-PA0 (no transformer) VG4-A-PA1 (120 VAC transformer) VG4-A-PA2 (230 VAC transformer) |
| Pendant Arm with Wiring | VG4-PEND-ARM |
| Mounting plate for VG4-PEND-ARM | VG4-PEND-WPLATE |
| Trim skirt for VG4 Series Power Supplies | VG4-A-TSKIRT |


Optional Mounting Plates for Arm Mounts

| Corner Mounting Plate | VG4-A-9542 |
|--|---|
| Pole Mounting Plate | VG4-A-9541 |
| Pendant Pipe Mounts | |
| Pipe Mount Kit | VG4-A-9543 |
| Pendant Roof Mounts | |
| Roof (Parapet) Mount (VG4-A-9543 Pipe Mount Kit required. Available separately.) | VGA-ROOF-MOUNT (with 1.5-inch NPT tapered male threads) |


Optional Mounting Plates for Roof Mounts

| Flat Roof Adapter for Parapet Mount | LTC 9230/01 |
|-------------------------------------|--|
| In-ceiling Support Kits | VGA-IC-SP (Bracket for suspended or drop ceilings) |

Dimensional Drawings

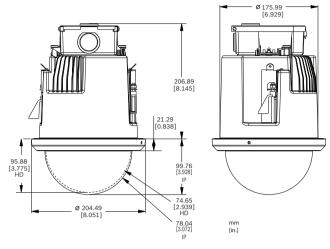


AUTODOME 7000 series In-ceiling

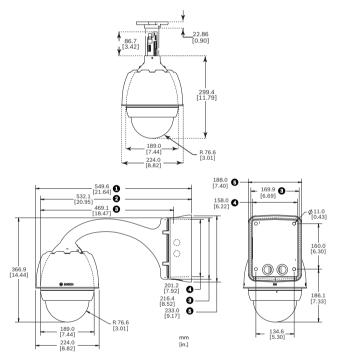

AUTODOME 7000 series Pipe, Pendant mounts

- 1 Power supply box and sunshield
- 4 Power supply box
- 2 Sunshield removed
- 5 Trim skirt
- 3 Mounting plate

9 | AUTODOME IP starlight 7000i

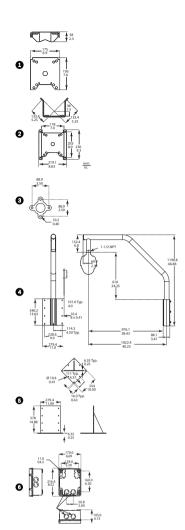

AUTODOME 7000 series Optional Mounts

1 Pole (Mast) Mount 4 Roof Mount

2 Corner Mount 5 Roof Mount Adapter

3 Pipe Mount 6 Power Supply for Pipe and

Roof Mounts

Ordering information

NDP-7512-Z30 PTZ 2MP HDR 30x clear IP66 pendant

PTZ dome camera; 1080 (2MP) HD, 30x, starlight imaging, H.265, IVA. Outdoor pendant mount

Order number NDP-7512-Z30

NDP-7512-Z30C PTZ 2MP HDR 30x clear IP54 in-ceil-

PTZ dome camera; 1080 (2MP) HD, 30x, starlight imaging, H.265, IVA. Indoor, in-ceiling mount, clear bubble

Order number NDP-7512-Z30C

NDP-7512-Z30CT PTZ 2MP HDR 30x tinted IP54 inceiling

PTZ dome camera; 1080 (2MP) HD, 30x, starlight imaging, H.265, IVA.

Indoor, in-ceiling mount, tinted bubble Order number NDP-7512-Z30CT

NDP-7512-Z30K PTZ 2MP HDR 30x clear IK10 pendant

PTZ dome camera; 1080 (2MP) HD, 30x, starlight imaging, H.265, IVA. Outdoor pendant mount, IK10

Order number NDP-7512-Z30K

Accessories

NPD-6001B High PoE midspan

60 W indoor midspan for cameras without illuminators
Order number NPD-6001B

VG4-A-PSU0 Power supply, 24VAC

Power supply, 24 VAC input, for a PTZ camera in the AUTODOME Series. White, aluminum enclosure with cover, rated IP66 and IK 08. 100 W output. Optional trim skirt (sold separately).

Order number VG4-A-PSU0

VG4-A-PSU1 PSU, 120VAC, for AUTODOME, MIC7000

Power supply for AUTODOME 7000, MIC IP cameras without illuminators.

120VAC in, 24VAC out

Order number VG4-A-PSU1

VG4-A-PSU2 Power supply, 230VAC, AUTODOME, MIC7000

Power supply for AUTODOME 7000, MIC IP cameras without illuminators.

230VAC in, 24VAC out

Order number VG4-A-PSU2

VGA-SBOX-COVER Cover for AUTODOME power supply box

Cover for AUTODOME Power Supply Boxes, white Order number **VGA-SBOX-COVER**

VG4-SFPSCKT ETHERNET TO SFP INTERFACE KIT

Ethernet media converter video transmitter/data receiver fiber optic kit for AUTODOME cameras, for MIC-IP-PSU for MIC analog cameras and for the Surveillance cabinets (NDA-U-PA0, NDA-U-PA1 and NDA-U-PA2).

Order number VG4-SFPSCKT

SFP-2 Fiber module, multimode, 1310nm, 2LC

SFP Fiber Optic Module, 2 km (1.2 miles), 2 LC connectors.

Multi-mode

1310 mm

Order number SFP-2

SFP-3 Fiber module, single-mode, 1310nm, 2LC

SFP Fiber Optic Module, 20 km (12.4 miles), 2 LC connectors.

Single-mode

1310 nm

Order number SFP-3

SFP-25 Fiber module, 1310/1550nm, 1SC

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector

Multi-mode

1310/1550 nm

Order number SFP-25

SFP-26 Fiber module, 1550/1310nm, 1SC

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector

Multi-mode

1550/1310 nm Order number **SFP-26**

VG4-A-PA0 Pendant arm, power box, 24VAC, AUTO-DOME

Pendant arm mount with power supply box for an AUTODOME Series camera, no transformer, white Order number VG4-A-PA0@1

VG4-A-PA1 Pendant arm, power box, 120VAC, AUTO-DOME

Pendant arm mount with power supply box for an AUTODOME Series camera with a 120 VAC transformer, white

Order number VG4-A-PA1

VG4-A-PA2 Pendant arm, power box, 230VAC, AUTO-DOME

Pendant arm mount with power supply box for an AUTODOME Series camera with a 230 VAC transformer, white

Order number VG4-A-PA2@1

VGA-PEND-ARM Pendant arm with wiring, for AUTO-DOME

Compatible with an AutoDome Series pendant housing Order number VGA-PEND-ARM@1

VGA-PEND-WPLATE Mounting plate for VGA-PEND-ARM

Mounting plate for VGA-PEND-ARM, compatible with an AutoDome Series camera

Order number VGA-PEND-WPLATE

VGA-ROOF-MOUNT Roof parapet mount for AUTO-DOME series

Roof parapet mount, white

VG5-6xx/7xxx cameras require VG4-A-9543 Pipe Mount (sold separately).

NEZ-5130-/NEZ-5230- cameras require NDA-ADPTR-NPTMET (sold separately)

Order number VGA-ROOF-MOUNT

LTC 9230/01 Roof mount adapter

Flat Roof Mount Adapter for mounting a unit in an upright position on a flat surface.

Order number LTC 9230/01

VG4-A-9541 Pole mount adapter

Pole mount adapter for an AUTODOME pendant arm or a DINION imager, designed for poles with a diameter of 100-380 mm (4-15 in.), white

Order number VG4-A-9541

VG4-A-9542 Corner mount adapter for AUTODOME

Corner mount adapter for an AUTODOME pendant arm or a DINION imager

Order number VG4-A-9542

VG4-A-9543 Pipe mount for AUTODOME, white

Pipe mount, white, for an AutoDome Series pendant housing

Order number VG4-A-9543

VGA-IC-SP Suspended ceiling support kit.7"

Suspended ceiling support kit for dome cameras. Aperture Ø177 mm (Ø7 in). Maximum supported weight 11.3 kg (25 lb).

Order number VGA-IC-SP

VG4-A-TSKIRT Trim skirt for AUTODOME power supply box

Trim skirt for the following AutoDome Series power supply boxes:

VG4-A-PSU0, VG4-A-PSU1, and VG4-A-PSU2 Order number **VG4-A-TSKIRT**

VGA-BUBBLE-PCLA Bubble, pendant, clear

Low-impact acrylic bubble
Order number VGA-BUBBLE-PCLA

VGA-BUBBLE-PTIA Bubble, pendant, tinted

Low-impact acrylic bubble Order number VGA-BUBBLE-PTIA

VGA-BUBLRG-CCLA Bubble, in-ceiling, large, clear

High-resolution bubble for AUTODOME in-ceiling cameras, clear

Order number VGA-BUBLRG-CCLA

VGA-BUBHD-CTIA Bubble, in-ceiling, tinted

High-resolution acrylic bubble for AUTODOME HD inceiling cameras, tinted

Order number VGA-BUBHD-CTIA

VGA-BUBBLE-CTIR Bubble, in-ceiling, tinted, rugged

Impact resistant polycarbonate bubble Order number VGA-BUBBLE-CTIR

VGA-BUBBLE-CCLR Bubble, in-ceiling, clear, rugged

Impact resistant polycarbonate bubble Order number VGA-BUBBLE-CCLR

VGA-BUBBLE-IK10 Bubble, pendant, IK10-rated

IK10-rated bubble qualified for use with AUTODOME 7000 HD cameras with pendant housings Order number **VGA-BUBBLE-IK10**

Software Options

MVC-CT-PTZ License for PTZs

Camera Trainer license for Intelligent Video Analytics 7.10 on PTZ cameras. Free-of-charge software module. Order number MVC-CT-PTZ

Represented by:

Europe, Middle East, Africa: Bosch Security Systems B.V. P.O. Box 80002 5600 JB Eindhoven, The Netherlands Phone: + 31 40 2577 284 emea.securitysystems@bosch.com emea.boschsecurity.com Germany: Bosch Sicherheitssysteme GmbH Robert-Bosch-Ring 5 85630 Grasbrunn Germany www.boschsecurity.com North America: Bosch Security Systems, Inc. 130 Perinton Parkway Fairport, New York, 14450, USA Phone: +1 800 289 0096 Fax: +1 585 223 9180

Phone: +1 800 289 0096 Fax: +1 585 223 9180 onlinehelp@us.bosch.com www.boschsecurity.us Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6571 2808 Fax: +65 6571 2699 apr. security systems@bosch.com www.boschsecurity.asia